



Fluorescent Lamps



A Solution for Every Application

Fluorescent lamp characteristics vary widely according to lamp types; in general, fluorescent lamps provide:

- ▶ Excellent light quality
- ▶ Low operating costs
- ▶ Long life
- ▶ Increased lumen maintenance
- ▶ Dimmable options
- ▶ Extended warranty when used with STANDARD ballasts



Recycling ensures that all the lamp components, including 99.98 % of the mercury contained in each lamp, are recovered and recycled, thus reducing the environmental impact.



The EPA's Toxicity Characteristic Leaching Procedure (TCLP) test is used to determine if an item can be managed as either hazardous or non-hazardous waste. TCLP compliant lamps can be managed as non-hazardous waste.



For more information on terms and conditions of the fluorescent lamp warranty or the One System Warranty please visit www.standardpro.com.

Energy Saving Table

Retrofit options	Benefits	Examples
Energy Savings	Saving money and conserve energy	Convert HID to T5HO in highbay applications
Extended Lamp Life	Reduce maintenance	Convert T12 lamps to T8 long life
More Light Output	Increase light levels or delamp and maintain current levels	Convert T8 700 series to T8 XL31 high lumen

Safety Max Lamps



- ▶ Safety Max coated lamps help contain glass, mercury, metal and phosphors if a lamp is broken
- ▶ Offers UV protection for sensitive applications such as art galleries, museums and exhibition centers
- ▶ Shatterproof to protect employees, production, customers, and your business reputation





IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life IS (3 hrs)	Rated life PS (12 hrs)	Rated life PS/PRS (3 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
------------	-------------	-----------	------	------------------	-----	-----------------------	------------------------	---------------------------	---------------------	------------------	-------------------------	-----------------	----------

T4
Dia. : 1 1/32 in. (12 mm)

10615	F8T4/35K/330mm/G5/STD	8	G5	3 500	80	N/A	N/A	8 000	440	N/A	13 (330)	55	200
10627	F8T4/41K/330mm/G5/STD	8	G5	4 100	80	7 000	8 000	N/A	380	357	13 (330)	48	200
10628	F10T4/41K/309mm/G5/STD	10	G5	4 100	80	7 000	8 000	N/A	500	470	12 (305)	50	48
10629	F12T4/41K/430mm/G5/STD	12	G5	4 100	80	7 000	8 000	N/A	600	564	17 (430)	50	48
10617	F16T4/35K/475mm/G5/STD	16	G5	3 500	80	7 000	8 000	N/A	1 000	940	19 (475)	63	200
10630	F16T4/41K/475mm/G5/STD	16	G5	4 100	80	7 000	8 000	N/A	1 000	940	19 (475)	63	48
10618	F20T4/35K/520mm/G5/STD	20	G5	3 500	80	N/A	N/A	8 000	1 200	N/A	20 (520)	60	200
10631	F20T4/41K/520mm/G5/STD	20	G5	4 100	80	7 000	8 000	N/A	1 280	1 203	20 (520)	64	48
15993	F20T4/64K/520mm/STD	20	G5	6 500	80	N/A	N/A	3 000	1 200	N/A	20 (520)	60	50

IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
------------	-------------	-----------	------	------------------	-----	---------------------------	----------------------------	---------------------	------------------	-------------------------	-----------------	----------

T5*
Dia. : 1/8 in. (16 mm)

58977	F4T5/CW/PH/G5/STD	4	G5	4 100	85	6 000	8 000	140	130	6 (152)	35	100
58981	F4T5/DL/PH/G5/STD	4	G5	6 500	82	6 000	8 000	120	115	6 (152)	30	100
58978	F6T5/CW/PH/G5/STD	6	G5	4 100	85	6 000	8 000	280	265	9 (229)	47	100
58980	F6T5/DL/PH/G5/STD	6	G5	6 500	82	6 000	8 000	240	230	9 (229)	40	100
58976	F8T5/WW/PH/G5/STD	8	G5	3 000	85	6 000	8 000	450	420	12 (305)	56	100
58979	F8T5/CW/PH/G5/STD	8	G5	4 100	85	6 000	8 000	420	400	12 (305)	53	100
58974	F8T5/DL/PH/G5/STD	8	G5	6 500	82	6 000	8 000	400	380	12 (305)	50	100
10600	F14T5/30K/8/PS/G5/STD	14	G5	3 000	85	24 000	30 000	1 350	1 280	22 (559)	96	25
10601	F14T5/35K/8/PS/G5/STD	14	G5	3 500	85	24 000	30 000	1 350	1 280	22 (559)	96	25
10602	F14T5/41K/8/PS/G5/STD	14	G5	4 100	85	24 000	30 000	1 350	1 280	22 (559)	96	25
10603	F21T5/30K/8/PS/G5/STD	21	G5	3 000	85	24 000	30 000	2 100	1 995	34 (864)	100	25
10604	F21T5/35K/8/PS/G5/STD	21	G5	3 500	85	24 000	30 000	2 100	1 995	34 (864)	100	25
10605	F21T5/41K/8/PS/G5/STD	21	G5	4 100	85	24 000	30 000	2 100	1 995	34 (864)	100	25
10606	F28T5/30K/8/PS/G5/STD	28	G5	3 000	85	24 000	30 000	2 900	2 755	46 (1 168)	104	25
10607	F28T5/35K/8/PS/G5/STD	28	G5	3 500	85	24 000	30 000	2 900	2 755	46 (1 168)	104	25
10608	F28T5/41K/8/PS/G5/STD	28	G5	4 100	85	24 000	30 000	2 900	2 755	46 (1 168)	104	25
58121	F28T5/50K/8/PS/G5/STD	28	G5	5 000	85	24 000	30 000	2 750	2 610	46 (1 168)	98	25
10609	F35T5/30K/8/PS/G5/STD	35	G5	3 000	85	24 000	30 000	3 650	3 450	58 (1 473)	104	25
10610	F35T5/35K/8/PS/G5/STD	35	G5	3 500	85	24 000	30 000	3 650	3 450	58 (1 473)	104	25
10611	F35T5/41K/8/PS/G5/STD	35	G5	4 100	85	24 000	30 000	3 650	3 450	58 (1 473)	104	25



T4 & T5 Lamps



- ▶ High colour consistency and system efficiency
- ▶ Compact and slim lamp size
- ▶ Energy savings and reduced maintenance cost
- ▶ Perfect choice for tight-space lighting applications
- ▶ Low mercury content and TCLP compliant
- ▶ One System extended lamp/ballast warranty

IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
T5HO												
Dia.: 7/8 in. (16 mm)												
10238	F24T5/30K/8/HO/PS/G5/STD	24	G5	3 000	85	24 000	30 000	2 000	1 900	22 (559)	83	25
10239	F24T5/35K/8/HO/PS/G5/STD	24	G5	3 500	85	24 000	30 000	2 000	1 900	22 (559)	83	25
10237	F24T5/41K/8/HO/PS/G5/STD	24	G5	4 100	85	24 000	30 000	2 000	1 900	22 (559)	83	25
10240	F39T5/30K/8/HO/PS/G5/STD	39	G5	3 000	85	24 000	30 000	3 500	3 325	34 (864)	90	25
10241	F39T5/35K/8/HO/PS/G5/STD	39	G5	3 500	85	24 000	30 000	3 500	3 325	34 (864)	90	25
10242	F39T5/41K/8/HO/PS/G5/STD	39	G5	4 100	85	24 000	30 000	3 500	3 325	34 (864)	90	25
60016	F49T5/30K/8/HO/PS/G5/STD ESV	49	G5	3 000	85	24 000	30 000	4 900	4 650	46 (1 168)	100	25
60017	F49T5/35K/8/HO/PS/G5/STD ESV	49	G5	3 500	85	24 000	30 000	4 900	4 650	46 (1 168)	100	25
60018	F49T5/41K/8/HO/PS/G5/STD ESV	49	G5	4 100	85	24 000	30 000	4 900	4 650	46 (1 168)	100	25
60019	F49T5/50K/8/HO/PS/G5/STD ESV	49	G5	5 000	85	24 000	30 000	4 800	4 550	46 (1 168)	98	25
65493	F54T5/30K/8/HO/PS/G5/STD	54	G5	3 000	85	35 000	40 000	5 000	4 450	46 (1 168)	93	25
10244	F54T5/35K/8/HO/PS/G5/STD	54	G5	3 500	85	24 000	30 000	5 000	4 750	46 (1 168)	93	25
65496	F54T5/41K/8/HO/PS/G5/STD	54	G5	4 100	85	35 000	40 000	5 000	4 450	46 (1 168)	93	25
59897	F54T5/41K/8/HO/PS/G5/STD BULK	54	G5	4 100	85	24 000	30 000	5 000	4 750	46 (1 168)	93	40
65498	F54T5/50K/8/HO/PS/G5/STD	54	G5	5 000	85	35 000	40 000	4 900	4 350	46 (1 168)	89	25
65499	F54T5/65K/8/HO/PS/G5/STD	54	G5	6 500	85	35 000	40 000	4 750	4 250	46 (1 168)	87	25
10613	F54T5/FS/HO/PS/G5/STD	54	G5	5 700	92	24 000	30 000	5 000	4 750	46 (1 168)	93	25
10248	F80T5/41K/8/HO/PS/G5/STD	80	G5	4 100	85	24 000	30 000	7 000	6 650	58 (1 473)	88	25



T5HO High Output Lamps




IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life IS (3 hrs)	Rated life IS (12 hrs)	Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
T8														
Dia. : 1 in. (26 mm)														
10426	F13T8/CW/PH/G13/STD	13	G13	4 100	62	6 000	7 500	N/A	N/A	530	498	12 (305)	41	48
15805	F14T8/CW/PH/G13/STD	14	G13	4 100	62	6 000	7 500	N/A	N/A	685	644	15 (381)	49	48
10634	F14T8/DL/PH/G13/STD	14	G13	6 500	62	6 000	7 500	N/A	N/A	575	541	15 (381)	41	48
62021	F15T8/WW/PH/G13/STD	15	G13	3 000	50	N/A	N/A	24 000	30 000	900	800	18 (457)	60	25
62022	F15T8/CW/PH/G13/STD	15	G13	4 100	60	N/A	N/A	24 000	30 000	850	750	18 (457)	57	25
62023	F15T8/DL/PH/G13/STD	15	G13	6 500	75	N/A	N/A	24 000	30 000	800	700	18 (457)	53	25
10510	F30T8/CW/PH/G13/STD	30	G13	4 100	62	6 000	7 500	N/A	N/A	2 180	2 049	36 (915)	73	48
10614	F30T8/DL/PH/G13/STD	30	G13	6 500	62	6 000	7 500	N/A	N/A	1 500	1 410	36 (915)	50	24
700 series														
Dia. : 1 in. (26 mm)														
10010	F17T8/35K/7/RS/G13/STD ESV	17	G13	3 500	75	N/A	N/A	24 000	30 000	1 300	1 235	24 (610)	76	25
10011	F17T8/41K/7/RS/G13/STD ESV	17	G13	4 100	75	N/A	N/A	24 000	30 000	1 300	1 235	24 (610)	76	25
10794	F25T8/35K/7/RS/G13/STD ESV	25	G13	3 500	75	24 000	30 000	30 000	36 000	2 000	1 800	36 (915)	80	25
10013	F25T8/41K/7/RS/G13/STD ESV	25	G13	4 100	75	24 000	30 000	30 000	36 000	2 000	1 800	36 (915)	80	25
151163	F32T8/35K/7/RS/G13/STD ESV	32	G13	3 500	75	20 000	24 000	24 000	30 000	2 850	2 700	48 (1 220)	89	25
151164	F32T8/41K/7/RS/G13/STD ESV	32	G13	4 100	75	20 000	24 000	24 000	30 000	2 800	2 650	48 (1 220)	88	25
51165	F32T8/50K/7/RS/G13/STD ESV	32	G13	5 000	75	20 000	24 000	24 000	30 000	2 800	2 650	48 (1 220)	88	25
10308	F40T8/41K/7/RS/G13/STD	40	G13	4 100	75	20 000	24 000	24 000	30 000	3 300	3 135	60 (1 524)	83	25

*This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.



T8 Lamps

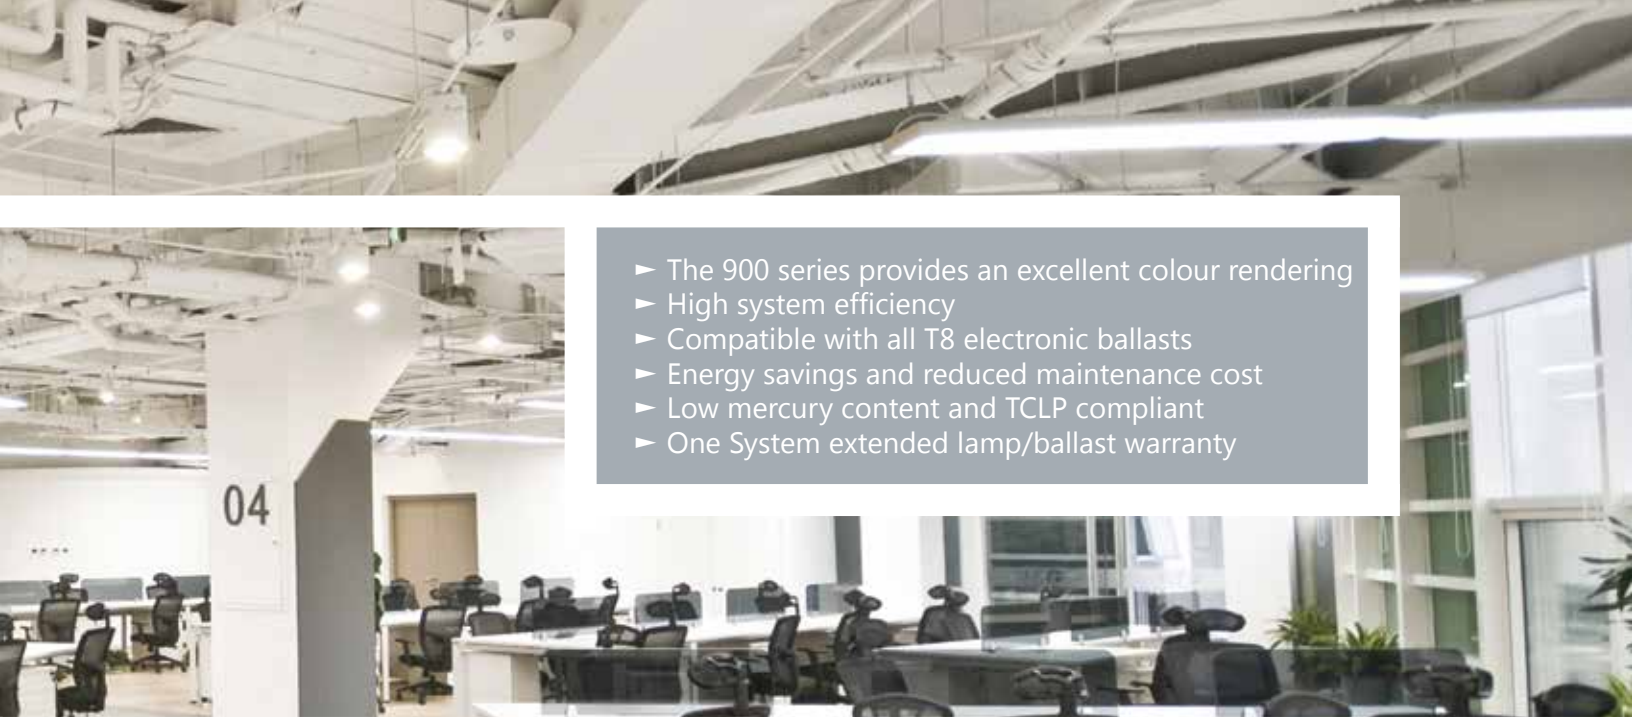

- ▶ The 900 series provides an excellent colour rendering
- ▶ High system efficiency
- ▶ Compatible with all T8 electronic ballasts
- ▶ Energy savings and reduced maintenance cost
- ▶ Low mercury content and TCLP compliant
- ▶ One System extended lamp/ballast warranty

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life IS (3 hrs)	Rated life IS (12 hrs)	IS=Instant Start ballast		PS=Program Start ballast		PRS=Program Rapid Start ballast		Efficacy (lm/W)	Case qty
								Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)			
800 series															
Dia. : 1 in. (26 mm)															
10014	F17T8/30K/8/RS/G13/STD ESV	17	G13	3 000	85	N/A	N/A	24 000	30 000	1 400	1 330	24 (610)	82	25	
10015	F17T8/35K/8/RS/G13/STD ESV	17	G13	3 500	85	N/A	N/A	24 000	30 000	1 400	1 330	24 (610)	82	25	
10002	F17T8/41K/8/RS/G13/STD ESV	17	G13	4 100	85	N/A	N/A	24 000	30 000	1 400	1 330	24 (610)	82	25	
65483	F25T8/30K/8/RS/G13/STD ESV	25	G13	3 000	85	24 000	30 000	30 000	36 000	2 150	2 040	36 (915)	86	25	
10912	F25T8/35K/8/RS/G13/STD ESV	25	G13	3 500	85	24 000	30 000	30 000	36 000	2 150	2 040	36 (915)	86	25	
65486	F25T8/41K/8/RS/G13/STD ESV	25	G13	4 100	85	24 000	30 000	30 000	36 000	2 150	2 040	36 (915)	86	25	
58635	F25T8/830HL/ES/STD	25	G13	3 000	85	24 000	30 000	40 000	42 000	2 400	2 300	48 (1 220)	96	25	
57124	F25T8/835HL/ES/STD	25	G13	3 500	85	24 000	30 000	40 000	42 000	2 400	2 300	48 (1 220)	96	25	
57122	F25T8/841HL/ES/STD	25	G13	4 100	85	24 000	30 000	40 000	42 000	2 400	2 300	48 (1 220)	96	25	
56505	F28T8/830HL/ES/STD	28	G13	3 000	85	24 000	30 000	40 000	42 000	2 725	2 560	48 (1 220)	97	25	
56506	F28T8/835HL/ES/STD	28	G13	3 500	85	24 000	30 000	40 000	42 000	2 725	2 560	48 (1 220)	97	25	
65490	F28T8/841HL/ES/STD	28	G13	4 100	85	24 000	30 000	40 000	42 000	2 725	2 560	48 (1 220)	97	25	
56508	F28T8/850HL/ES/STD	28	G13	5 000	85	24 000	30 000	40 000	42 000	2 625	2 500	48 (1 220)	94	25	
56501	F30T8/830HL/ES/STD	30	G13	3 000	86	24 000	30 000	40 000	42 000	2 850	2 700	48 (1 220)	95	25	
56502	F30T8/835HL/ES/STD	30	G13	3 500	86	24 000	30 000	40 000	42 000	2 850	2 700	48 (1 220)	95	25	
56503	F30T8/841HL/ES/STD	30	G13	4 100	86	24 000	30 000	40 000	42 000	2 850	2 700	48 (1 220)	95	25	
56504	F30T8/850HL/ES/STD	30	G13	5 000	86	24 000	30 000	40 000	42 000	2 750	2 600	48 (1 220)	92	25	
62981	F32T8/30K/8/RS/G13/STD ESV BULK	32	G13	3 000	85	24 000	30 000	40 000	42 000	3 050	2 900	48 (1 220)	95	25	
51167	F32T8/35K/8/RS/G13/STD ESV	32	G13	3 500	85	24 000	30 000	40 000	42 000	3 050	2 900	48 (1 220)	95	25	
51168	F32T8/41K/8/RS/G13/STD ESV	32	G13	4 100	85	24 000	30 000	40 000	42 000	3 050	2 900	48 (1 220)	92	25	
59898	F32T8/41K/8/RS/G13/STD ESV BULK	32	G13	4 100	85	24 000	30 000	40 000	42 000	3 050	2 900	48 (1 220)	94	25	
10004	F32T8/50K/8/RS/G13/STD ESV	32	G13	5 000	85	24 000	30 000	40 000	42 000	2 950	2 800	48 (1 220)	92	25	
62984	F32T8/65K/8/RS/G13/STD ESV BULK	32	G13	6 500	85	24 000	30 000	40 000	42 000	2 900	2 750	48 (1 220)	91	25	
10309	F40T8/41K/8/RS/G13/STD	40	G13	4 100	85	20 000	24 000	24 000	30 000	3 700	3 600	60 (1 524)	93	25	
900 series¹															
Dia. : 1 in. (26 mm)															
65492	F32T8/50K/9/RS/G13/STD ESV	32	G13	5 000	95	15 000	24 000	20 000	28 000	2 100	2 000	48 (1 220)	66	25	
51174	F32T8/FS/RS/G13/STD	32	G13	5 700	92	20 000	24 000	24 000	30 000	2 300	2 185	48 (1 220)	72	25	

OUTDOOR

INDOOR

WARRANTY

CRI 90+

TCLP COMPLIANT

RECYCLABLE

ENERGY SAVING

ONE SYSTEM WARRANTY

T8 Lamps



- ▶ Excellent colour rendering
- ▶ High system efficiency
- ▶ Compatible with all T8 electronic ballasts
- ▶ Energy savings and reduced maintenance cost
- ▶ Low mercury content and TCLP compliant
- ▶ One System extended lamp/ballast warranty
- ▶ XL31 lamps are ideal for applications where a high lumen rating is necessary
- ▶ Long life lamps are ideal for applications where relamping is a challenge



IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life IS (3 hrs)	Rated life IS (12 hrs)	Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
T8 XL31 ¹														
Dia.: 1 in. (26 mm)														
10914	F32T8/830K/XL31/STD	32	G13	3 000	89	20 000	24 000	24 000	30 000	3 100	2 950	48 (1 220)	97	25
10915	F32T8/835K/XL31/STD	32	G13	3 500	89	20 000	24 000	24 000	30 000	3 100	2 950	48 (1 220)	97	25
10916	F32T8/841K/XL31/STD	32	G13	4 100	89	20 000	24 000	24 000	30 000	3 100	2 950	48 (1 220)	97	25
10917	F32T8/850K/XL31/STD	32	G13	5 000	89	20 000	24 000	24 000	30 000	3 000	2 850	48 (1 220)	94	25
T8 Long Life ²														
Dia.: 1 in. (26 mm)														
60855	F28T8/35K/8/RS/G13/STD ESV LL	28	G13	3 500	85	36 000	40 000	55 000	60 000	2 675	2 540	48 (1 220)	96	25
65489	F28T8/41K/8/RS/G13/STD ESV LL	28	G13	4 100	82	36 000	40 000	55 000	60 000	2 700	2 540	48 (1 220)	96	25
60857	F28T8/50K/8/RS/G13/STD ESV LL	28	G13	5 000	85	36 000	40 000	55 000	60 000	2 575	2 450	48 (1 220)	92	25
60853	F32T8/35K/8/RS/G13/STD ESV LL	32	G13	3 500	85	36 000	40 000	55 000	60 000	2 950	2 800	48 (1 220)	92	25
60852	F32T8/41K/8/RS/G13/STD ESV LL	32	G13	4 100	85	36 000	40 000	55 000	60 000	2 950	2 800	48 (1 220)	92	25
60856	F32T8/50K/8/RS/G13/STD ESV LL	32	G13	5 000	85	36 000	40 000	55 000	60 000	2 850	2 700	48 (1 220)	89	25



OUTDOOR



INDOOR



WARRANTY



WARRANTY



TCLP COMPLIANT



RECYCLABLE



ENERGY SAVING



ONE SYSTEM WARRANTY

T8 Lamps



- ▶ High colour rendering index of 90
- ▶ A superior quality lighting that enhances the natural colour of the surrounding objects
- ▶ TCLP compliant
- ▶ One System extended lamp/ballast warranty

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	PS=Program Start ballast		PRS=Program Rapid Start ballast			
						Rated life PS/PRS (3 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
T12 Dia. : 1 1/2 in. (38 mm)											
900 series											
64251	F40T12/41K/9/RS/G13/STD	40	G13	4 100	90	24 000	2 500	2 500	48 (1 220)	63	30
64252	F40T12/50K/9/RS/G13/STD	40	G13	5 000	90	24 000	2 250	2 250	48 (1 220)	56	30
64253	F40T12/65K/9/RS/G13/STD	40	G13	6 500	90	24 000	2 250	2 250	48 (1 220)	56	30
T12 U-bent Dia. : 1 1/2 in. (38 mm)											
900 series											
64255	FB40T12/41K/9/U6/RS/G13/STD	40	G13	4 100	90	24 000	2 500	2 500	22.6 (574)	63	12
64256	FB40T12/65K/9/U6/RS/G13/STD	40	G13	6 500	90	24 000	2 250	2 250	22.6 (574)	56	12



T12 & T12 U-Bent Lamps



IS=Instant Start ballast PS=Program Start ballast PRS=Program Rapid Start ballast

Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	Rated life IS (3 hrs)	Initial lumens (lm)	Mean lumens (lm)	Nominal length in. (mm)	Efficacy (lm/W)	Case qty
------------	-------------	-----------	------	------------------	-----	-----------------------	---------------------	------------------	-------------------------	-----------------	----------

Circline

Dia. : 1 3/16 in. (30 mm)

58984	FC6T9/CW/RS/4P/STD	20	G10q-4	4 100	82	10 000	890	850	7 (165)	45	12
58985	FC8T9/WW/RS/4P/STD	22	G10q-4	3 000	82	10 000	1 450	1 380	8 (210)	66	12
58983	FC8T9/CW/RS/4P/STD	22	G10q-4	4 100	82	10 000	1 350	1 280	8 (210)	61	24
58982	FC8T9/DL/RS/4P/STD	22	G10q-4	6 500	82	10 000	1 210	1 150	8 (210)	55	24
58986	FC12T9/CW/RS/4P/STD	32	G10q-4	4 100	82	10 000	2 300	2 185	12 (305)	72	24
58987	FC12T9/DL/RS/4P/STD	32	G10q-4	6 500	82	10 000	2 000	1 900	12 (305)	63	12
58988	FC16T9/CW/RS/4P/STD	40	G10q-4	4 100	82	10 000	3 150	3 000	16 (406)	79	12

U-bent Lamps

Dia. : 1 in. (26 mm)

700 series

¹ 10480	FB32T8/35K/7/U6/RS/G13/STD ESV	32	G13	3 500	75	20 000	2 450	2 200	22.5 (572)	77	20
¹ 10481	FB32T8/41K/7/U6/RS/G13/STD ESV	32	G13	4 100	75	20 000	2 450	2 200	22.5 (572)	77	20

800 series

57522	FB28T8/30K/8/U6/RS/G13/STD	28	G13	3 000	85	20 000	2 600	2 350	22.5 (572)	93	20
57519	FB28T8/35K/8/U6/RS/G13/STD	28	G13	3 500	85	20 000	2 600	2 350	22.5 (572)	93	20
57518	FB28T8/41K/8/U6/RS/G13/STD	28	G13	4 100	85	20 000	2 600	2 350	22.5 (572)	93	20
58698	FB31T8/35K/8/U1/RS/G13/STD	31	G13	3 500	82	24 000	2 750	2 610	22.5 (572)	89	20
58697	FB31T8/41K/8/U1/RS/G13/STD	31	G13	4 100	82	24 000	2 750	2 610	22.5 (572)	89	20
10482	FB32T8/30K/8/U6/RS/G13/STD ESV	32	G13	3 000	85	20 000	2 800	2 550	22.5 (572)	88	20
65501	FB32T8/35K/8/U6/RS/G13/STD ESV	32	G13	3 500	85	20 000	2 800	2 550	22.5 (572)	88	20
65502	FB32T8/41K/8/U6/RS/G13/STD ESV	32	G13	4 100	85	20 000	2 800	2 550	22.5 (572)	88	20
65503	FB32T8/50K/8/U6/RS/G13/STD ESV	32	G13	5 000	86	20 000	2 750	2 500	22.5 (572)	86	20



¹ This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.
² One year warranty on lamps with less than 18 000 hours average life
³ Two year warranty on lamps with more than 18 000 hours average life

Circline & U-Bent



Order code	Description	Watts (W)	Base	Colour temp. (K)	CRI	IS=Instant Start ballast		PS=Program Start ballast		PRS=Program Rapid Start ballast		Efficacy (lm/W)	Case qty	
						Rated life IS (3 hrs)	Rated life IS (12 hrs)	Rated life PS/PRS (3 hrs)	Rated life PS/PRS (12 hrs)	Initial lumens (lm)	Mean lumens (lm)			Nominal length in. (mm)
Appliance														
10507	F16T8/CW/APL/26/PH/G13/STD	16	G13	4 100	62	6 000	7 500	N/A	N/A	1 275	1 199	26 (660)	80	48
10508	F17T8/CW/APL/28/PH/G13/STD	17	G13	4 100	62	6 000	7 500	N/A	N/A	1 350	1 269	28 (711)	79	48
10506	F18T8/CW/APL/24/PH/G13/STD	18	G13	4 100	62	6 000	7 500	N/A	N/A	1 225	1 152	24 (610)	68	48
10509	F18T8/CW/APL/30/PH/G13/STD	18	G13	4 100	62	6 000	7 500	N/A	N/A	1 400	1 316	30 (762)	78	100
Metric														
10496	F32T8/35K/8/RS/G13/METRIC/STD	32	G13	3 500	85	24 000	30 000	30 000	36 000	2 800	2 650	46 (1 168)	88	25
10497	F32T8/41K/8/RS/G13/METRIC/STD	32	G13	4 100	85	24 000	30 000	30 000	36 000	2 800	2 650	46 (1 168)	88	25
10498	F32T8/FS/RS/G13/METRIC/STD	32	G13	5 700	92	15 000	24 000	20 000	28 000	1 850	1 750	46 (1 168)	58	25
Cold Start (minimum starting temperature: -20°C)*														
59244	F32T8/41K/8/RS/G13/COLDSTART/STD	32	G13	4 100	85	24 000	30 000	30 000	36 000	2 600	2 450	48 (1 220)	81	25
59243	F54T5/41K/8/HO/PS/G5/COLDSTART/STD	54	G5	4 100	85	24 000	30 000	30 000	36 000	4 650	4 400	48 (1 220)	86	25
Coloured														
51171	F32T8/GLD/RS/G13/STD	32	G13	2 300	N/A	10 000	13 000	13 000	15 000	N/A	N/A	48 (1 220)	N/A	25
51177	F32T8/BL/RS/G13/STD	32	G13	N/A	N/A	8 000	10 000	10 000	12 000	N/A	N/A	48 (1 220)	N/A	25
51173	F32T8/BLB/RS/G13/STD	32	G13	N/A	N/A	8 000	10 000	10 000	12 000	N/A	N/A	48 (1 220)	N/A	25
Plant Light														
51176	F32T8/PLA/RS/G13/STD	32	G13	N/A	N/A	15 000	24 000	20 000	28 000	1 450	1 350	48 (1 220)	45	25
RGB (Red / Green / Blue)														
51175	F32T8/RS/G13/STD RGB	32	G13	N/A	82	15 000	24 000	20 000	28 000	1 650	1 550	48 (1 220)	52	25

* The minimum starting temperature is based on a STANDARD brand T5 or T8 cold start ballast.
¹ One year warranty on lamps with less than 18 000 hours average life
² Two year warranty on lamps with more than 18 000 hours average life



Specialty

Fluorescent Lamps

Standard Products 

StandardProInc 

Standardproducts 

Standard Products Inc 

STANDARD Products Inc 

STANDARD Products Inc 

Standard Products Inc 

STANDARD www.standardpro.com