

# B | BRAVA®

## ELECTRIC BASEBOARD



# BRAVA®



## THE REFERENCE ON THE MARKET

The B baseboard's reputation is well established. It's simply the most recognized and sought-after baseboard on the market. Now known as the Brava, this strong and durable baseboard stands out thanks to its rounded corners and unique, no-end-cap, one-piece design.

- **ROUNDED CORNERS**
- **QUICK AND EASY INSTALLATION**
- **STRONG CABINET**  
ONE-PIECE CONSTRUCTION
- **MAY BE CONTROLLED BY A BUILT-IN OR WALL THERMOSTAT**

### COLOURS

- **standard:** white, soft white
- **Orora (optional):** refer to [www.stelpro.com/en-CA/orora](http://www.stelpro.com/en-CA/orora)

### FINISH

- epoxy-polyester powdercoat

### MANUFACTURING

- 22-gauge steel casing able to support 75 kg (165 lb) at its centre
- full-length thermal protection with automatic reset
- cabinet designed to ensure optimal hot air distribution
- full-length wireway

### ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises

### CONTROL

- built-in thermostat installed in the left or right junction box (optional)
- single pole electronic thermostat installed in the left or right junction box (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- low voltage relay kit installed in the left junction box only (optional)

### INSTALLATION

- surface mounted
- knockouts for the BX and clamps for the NMD cables located at each end
- mounting holes spaced at 1-inch intervals along the top and the bottom of the unit

### WARRANTY

- five years. \*three years on electronic components and lifetime warranty on heating element (for original owner)

#### IDEAL FOR:

kitchen, living room, bedroom, office, basement, commercial space

# °STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. **No returns accepted on optional-colour products.** For all the latest models and prices, please refer to our website at [www.stelpro.com](http://www.stelpro.com).



# TECHNICAL SPECIFICATIONS

DENSITY OF 250 W PER LINEAR FOOT	POWER	VOLTAGE	LENGTH		WEIGHT		PRICE
			MM	IN.	KG	LB	
CODE	WATTS	VOLTS					
<b>B03019</b>	300	120	559	22	2.0	4.3	<b>73.00</b>
<b>B03089</b>	300	208	559	22	2.0	4.3	<b>60.00</b>
<b>B03029</b>	300/225	240/208	559	22	2.0	4.3	<b>57.00</b>
---	300	347	559	22	2.0	4.3	---
---	300	600	559	22	2.0	4.3	---
<b>B0501</b>	500	120	708	27 7/8	3.0	7	<b>78.00</b>
<b>B0508</b>	500	208	708	27 7/8	3.0	7	<b>63.00</b>
<b>B0502</b>	500/375	240/208	708	27 7/8	3.0	7	<b>60.00</b>
<b>B0503</b>	500	347	708	27 7/8	3.0	7	<b>78.00</b>
---	500	600	708	27 7/8	3.0	7	---
<b>B0751</b>	750	120	956	37 5/8	4.1	9	<b>84.00</b>
<b>B0758</b>	750	208	956	37 5/8	4.1	9	<b>72.00</b>
<b>B0752</b>	750/560	240/208	956	37 5/8	4.1	9	<b>69.00</b>
<b>B0753</b>	750	347	956	37 5/8	4.1	9	<b>84.00</b>
<b>B0756</b>	750	600	956	37 5/8	4.1	9	<b>84.00</b>
<b>B1001</b>	1000	120	1207	47 1/2	5.1	11	<b>98.00</b>
<b>B1008</b>	1000	208	1207	47 1/2	5.1	11	<b>84.00</b>
<b>B1002</b>	1000/750	240/208	1207	47 1/2	5.1	11	<b>80.00</b>
<b>B1003</b>	1000	347	1207	47 1/2	5.1	11	<b>98.00</b>
<b>B1006</b>	1000	600	1207	47 1/2	5.1	11	<b>98.00</b>
<b>B1251</b>	1250	120	1454	57 1/4	6.2	14	<b>117.00</b>
<b>B1258</b>	1250	208	1454	57 1/4	6.2	14	<b>97.00</b>
<b>B1252</b>	1250/940	240/208	1454	57 1/4	6.2	14	<b>94.00</b>
<b>B1253</b>	1250	347	1454	57 1/4	6.2	14	<b>117.00</b>
<b>B1256</b>	1250	600	1454	57 1/4	6.2	14	<b>117.00</b>
<b>B1501</b>	1500	120	1683	66 1/4	7.2	16	<b>128.00</b>
<b>B1508</b>	1500	208	1683	66 1/4	7.2	16	<b>105.00</b>
<b>B1502</b>	1500/1125	240/208	1683	66 1/4	7.2	16	<b>102.00</b>
<b>B1503</b>	1500	347	1683	66 1/4	7.2	16	<b>128.00</b>
<b>B1506</b>	1500	600	1683	66 1/4	7.2	16	<b>128.00</b>
---	1750	120	1930	76	8.2	18	---
<b>B1758</b>	1750	208	1930	76	8.2	18	<b>126.00</b>
<b>B1752</b>	1750/1315	240/208	1930	76	8.2	18	<b>121.00</b>
<b>B1753</b>	1750	347	1930	76	8.2	18	<b>152.00</b>
<b>B1756</b>	1750	600	1930	76	8.2	18	<b>152.00</b>
---	2000	120	2130	83 7/8	9.1	20	---
<b>B2008</b>	2000	208	2130	83 7/8	9.1	20	<b>136.00</b>
<b>B2002</b>	2000/1500	240/208	2130	83 7/8	9.1	20	<b>133.00</b>
<b>B2003</b>	2000	347	2130	83 7/8	9.1	20	<b>172.00</b>
<b>B2006</b>	2000	600	2130	83 7/8	9.1	20	<b>172.00</b>
---	2250	120	2381	93 3/4	10.2	22	---
<b>B2258</b>	2250	208	2381	93 3/4	10.2	22	<b>150.00</b>
<b>B2252</b>	2250/1690	240/208	2381	93 3/4	10.2	22	<b>146.00</b>
<b>B2253</b>	2250	347	2381	93 3/4	10.2	22	<b>186.00</b>
<b>B2256</b>	2250	600	2381	93 3/4	10.2	22	<b>186.00</b>
---	2500	120	2607	102 5/8	11.1	24	---
<b>B2508</b>	2500	208	2607	102 5/8	11.1	24	<b>162.00</b>
<b>B2502</b>	2500/1875	240/208	2607	102 5/8	11.1	24	<b>159.00</b>
<b>B2503</b>	2500	347	2607	102 5/8	11.1	24	<b>203.00</b>
<b>B2506</b>	2500	600	2607	102 5/8	11.1	24	<b>203.00</b>

Add W for white or SW for soft white (consult the optional colours chart or contact your Stelpro representative for all other colours).

Models also available in 277 V and 480 V.


--- not available

Please note that the width of the units may vary by more or less 1/16 in. (0.15 cm).

# BUILT-IN THERMOSTATS



**SIBTE** - ELECTRONIC

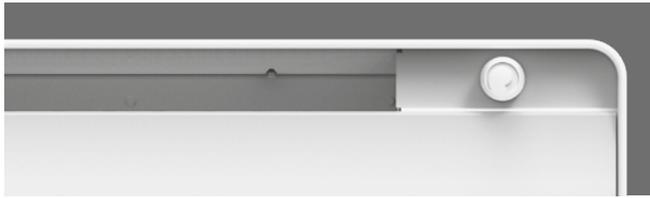

**SIBTx** - MECHANICAL




## ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
<b>SIBTE12C</b>	built-in electronic thermostat – Celsius [120 V-240 V]	<b>73.00</b>
<b>SIBTE13C</b>	built-in electronic thermostat – Celsius [277 V-347 V]	<b>97.00</b>
<b>SIBT1*</b>	built-in single pole thermostat [120 V-600 V]	<b>33.00</b>
<b>SIBT2*</b>	built-in double pole thermostat [120 V-600 V]	<b>40.00</b>
<b>SIBT2TP*</b>	built-in tamper-proof double pole thermostat [120 V-600 V]	<b>57.00</b>
<b>BRE153*</b>	built-in electronic low voltage relay [15 A @ 120 V-347 V]	<b>74.00</b>
<b>BRE156*</b>	built-in electronic low voltage relay [6 A @ 600 V]	<b>124.00</b>
<b>BRE153T*</b>	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	<b>94.00</b>
<b>BP*</b>	spray paint	<b>51.00</b>

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.  
 \* Add W for white or SW for soft white.

\* Factory installation

## TECHNICAL DRAWINGS

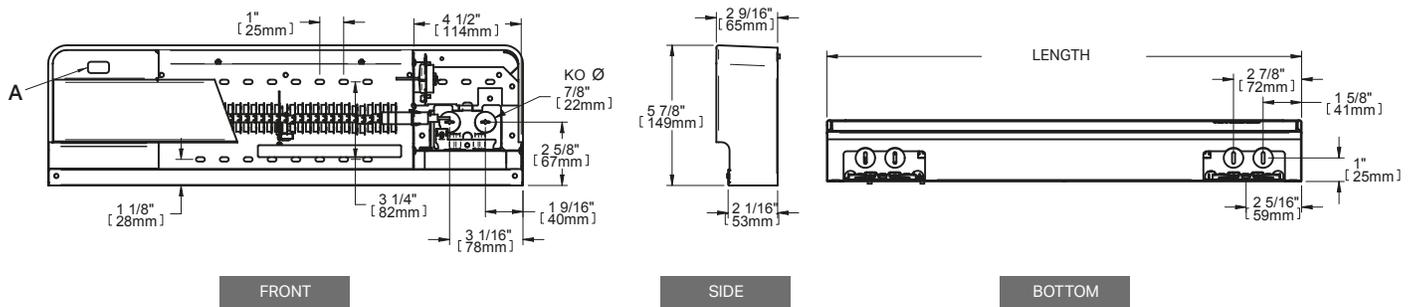

A = LOCATION OF BUILT-IN THERMOSTAT (OPTIONAL)

