


T&B Conduit Fittings

Liquidtight Flexible Metal Conduit Fittings




90° Angle Fittings

Insulated	Cat. No.	Aluminum	Hub Size	Conduit Size	Dimensions (in.)		
					A	B	C
	5251	5251AL	1/2"	3/8"	1-5/32	1-3/8	9/16
	5252	5252AL	1/2"	1/2"	1-3/8	1-9/16	9/16
	5253	5253AL	3/4"	3/4"	1-21/32	1-3/4	9/16
	5254	5254AL	1"	1"	1-7/8	2-3/16	3/4
	5255	5255AL	1-1/4"	1-1/4"	29/32	2-3/4	13/16
	5256	5256AL	1-1/2"	1-1/2"	2-23/32	2-15/16	13/16
	5257	5257AL	2"	2"	3-1/4	3-7/16	7/8
	5258	5258AL*	2-1/2"	2-1/2"	3-3/4	8-7/8	1
	5259	—	3"	3"	4-1/2	10-1/4	1
	5260	—	4"	4"	5-1/2	12-5/8	1-1/8

Suitable for hazardous locations use in CEC Rule 18-156 (6) Class I, Zone 2;
CEC Rule J18-152 (3) Class I, Division 2; CEC Rule 18-202 (4) Class II, Division 1;
CEC Rule 18-252 (4) Class II, Division 2.

U.L. Listed liquidtight; and CSA Certified watertight.

* Not CSA Certified.

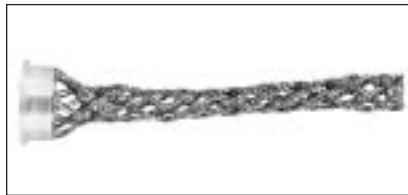

Prevents severe conduit bends and pullout.

Wiremesh Grips for Liquidtight Fittings



Cat. No.	Conduit Size	Liquidtight Fittings			90° Chase	Chase	Adapter
		Straight	45°	90°			
WMG-LT1	3/8"	5331	5341	5351	5361	5371	5271
WMG-LT2	1/2"	5332	5342	5352	5362	5372	5272
WMG-LT3	3/4"	5333	5343	5353	5363	5373	5273
WMG-LT4	1"	5334	5344	5354	5364	5374	5274
WMG-LT5	1-1/4"	5335	5345	5355	5365	—	5275
WMG-LT6	1-1/2"	5336	5346	5356	5366	—	5276
WMG-LT7	2"	5337	5347	5357	5367	—	5277
WMG-LT8	2-1/2"	5338	5348	5358	5368	—	5278
WMG-LT9	3"	5339	5349	5359	5369	—	5279
WMG-LT10	4"	5340	5350	5360	5370	—	5282

Order wiremesh grip separately; no need to duplicate inventory.