


LVT (FT4)

Conductor	Solid bare copper
Insulation	30V Colour coded PVC
Jacket	PVC Brown
Temperature	60°C
Approvals	CSA File# LL39965 CSA LVT FT4 RoHS Compliant
Packaging	x75, x150, x 300m

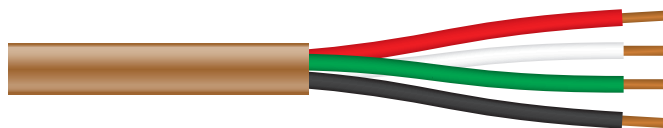

Product Code	Cond Size	# of Cond.	Cond. Strand	Nominal Insulation Thickness (inches)	Nominal Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
39A1602*	16	2	Solid	0.015	0.030	.147 x .229	30	12
39AA1802*	18	2	Solid	0.015	0.030	.138 x .212	22	12
39A1803	18	3	Solid	0.015	0.030	.223	31	12
39A1804	18	4	Solid	0.015	0.030	0.242	39	12
39A1805	18	5	Solid	0.015	0.030	0.263	47	12
39A1806	18	6	Solid	0.015	0.030	0.285	55	12
39A1808	18	8	Solid	0.015	0.030	0.309	70	12
39A1810	18	10	Solid	0.015	0.030	0.355	85	12


* Parallel

Colours: 18 AWG – Also available in White

Multi-Conductor LVT Type - PLENUM

CSA/FT6

Conductor	Solid bare copper
Insulation	300V Colour coded flame retardant PVC
Jacket	Grey PVC
Temperature	60°C
Approvals	UL listed CMP to harmonized standard C22.2 No.214 and UL 444 Passes CSA/FT6 flame and smoke test Passes UL 910 flame and smoke test
Applications	Low voltage heating and air conditioning controls, thermostats, door bells and annunciator systems, intercom systems, burglar and fire alarms.

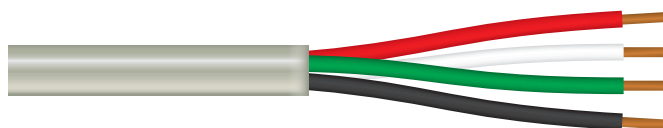

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42BA1802	18	2	Solid	0.008	0.015	0.130	16	1
42BA1803	18	3	Solid	0.008	0.015	0.158	22	1
42BA1804	18	4	Solid	0.008	0.015	0.167	28	1
42BA1805	18	5	Solid	0.008	0.015	0.190	34	1
42BA1806	18	6	Solid	0.008	0.015	0.204	40	1
42BA1807	18	7	Solid	0.008	0.015	0.204	46	1
42BA1808	18	8	Solid	0.008	0.015	0.222	52	1
42BA1810	18	10	Solid	0.008	0.015	0.271	65	1

ele06_mcond_04