

# LITELINE

TM  
MC

# HARDWIRE BOX

for ALUMINUM FLUORO BAR  
& XENO BAR SYSTEMS

## DESCRIPTION

Fluoro Bar and Xeno Bar Hardwire Box, with an on/off switch and 0.875-inch knock-out. Designed for use with both T4/T5 2-wire and 3-wire systems.



## Features

#ALFT6300-WH

- For 120V power input
- Hardwire to wall switch or use switch on the box
- Equipped with 10 amp 120V rocker switch
- Easy wiring hub, no wire nuts required
- Meets code for field hardwire installation
- Mounting hardware included
- Blister packaged
- cUL approved
- cETL approved




## Accessories


- Flexible connectors in four different lengths

Model	Catalogue No.	UPC	Bag w/ Header Card	Case Qty.
Hardwire Box	ALFT6300-WH	7-71250-91394-4	No	6
6" Connector	FBT6106-WH	7-71250-90794-3	Yes	6
12" Connector	FBT6100-WH	7-71250-90285-6	Yes	6
24" Connector	FBT6124-WH	7-71250-91106-3	Yes	6
36" Connector	FBT6136-WH	7-71250-90719-6	Yes	6

Select either the 2 or 3-wire port and remove the cover before connecting

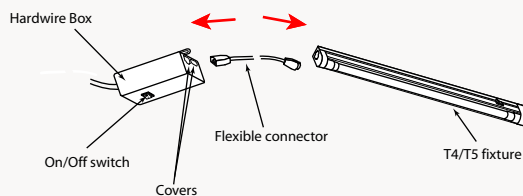

## Dimensions

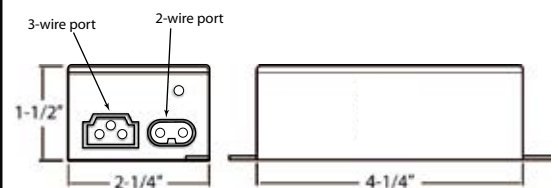

**LITELINE**  
CORPORATION

LITELINE CORPORATION, 8 Abacus Road, Brampton, Ontario, Canada L6T 5B7

Phone: 416-996-1856 • Fax: 905-794-1990/1-888-738-9736 • Email: sales@liteline.com • Website: www.liteline.com

Toll free technical support: 1-866-730-7704

rev. 08.08.07