


Nylon Fully-Insulated Female Disconnects




Wire Range (AWG)	Wire Range (mm²)	Tab Size (Inches)	Tab Size (mm)	Max. Wire Ins. Dia. (Inches)	Max. Wire Ins. Dia. (mm)	Dimensions (Inches)				Dimensions (mm)				Ctn. Qty.	Cat. No.	Ctn. Qty.	Cat. No.
						L	B	W	F	L	B	W	L				
22 – 18	0.5 – 1.0	.250 x .032	6.35 x 0.8	.150	3.8	.866	.433	.260	.287	22.0	11.0	6.6	7.3	25	83-9771	—	—
16 – 14	1.5 – 2.5	.250 x .032	6.35 x 0.8	.185	4.7	.866	.433	.260	.287	22.0	11.0	6.6	7.3	25	83-9781	1,000	84-9781
12 – 10	4.0 – 6.0	.250 x .032	6.35 x 0.8	.244	6.2	.945	.512	.260	.287	24.0	13.0	6.6	7.3	25	83-9791	500	84-9791

105° C/300 Volts max.



Nylon Fully-Insulated Male Disconnects




Wire Range (AWG)	Wire Range (mm²)	Tab Size (Inches)	Tab Size (mm)	Max. Wire Ins. Dia. (Inches)	Max. Wire Ins. Dia. (mm)	Dimensions (Inches)				Dimensions (mm)				Ctn. Qty.	Cat. No.
						L	B	W	F	L	B	W	F		
22 – 18	0.5 – 1.0	.250 x .032	6.35 x 0.8	.150	3.8	.906	.433	.250	.303	23.0	11.0	6.35	7.7	25	83-9911
16 – 14	1.5 – 2.5	.250 x .032	6.35 x 0.8	.185	4.7	.945	.433	.250	.303	24.0	11.0	6.35	7.7	25	83-9921
12 – 10	4.0 – 6.0	.250 x .032	6.35 x 0.8	.244	6.2	.984	.512	.250	.303	25.0	13.0	6.35	7.7	25	83-9931

105° C/300 Volts max.



Vinyl Insulated Bullet Disconnects





Wire Range (AWG)	Wire Range (mm²)	Max. Wire Ins. Dia. (Inches)	Max. Wire Ins. Dia. (mm)	Dimensions (Inches)				Dimensions (mm)				Ctn. Qty.	Cat. No.
				L	B	W	F	L	B	W	F		
22 – 18	0.5 – 1.0	.150	3.8	.846	.413	.157	.335	21.5	10.5	4.0	8.5	25	83-8001
16 – 14	1.5 – 2.5	.185	4.7	.846	.413	.157	.335	21.5	10.5	4.0	8.5	25	83-8011

75° C/300 Volts max.



Vinyl Fully-Insulated Receptacle Disconnects

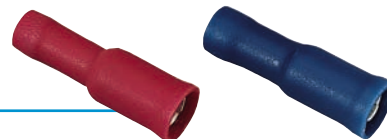

Wire Range (AWG)	Wire Range (mm²)	Max. Wire Ins. Dia. (Inches)	Max. Wire Ins. Dia. (mm)	Dimensions (Inches)				Dimensions (mm)				Ctn. Qty.	Cat. No.
				L	B	W	F	L	B	W	F		
22 – 18	0.5 – 1.0	.150	3.8	.917	.413	.153	.287	23.3	10.5	3.9	7.3	25	83-8101
16 – 14	1.5 – 2.5	.185	4.7	.917	.413	.153	.287	23.3	10.5	3.9	7.3	25	83-8111

75° C/300 Volts max.

