

Heavy-Wall Heat-Shrinkable Tubing


HS Series Heavy-Wall Heat-Shrinkable Tubing — Black

Cat. No.	Min. Expanded I.D. (in.)	Max. Recovered I.D. (in.)	Nom. Recovered Wall (in.)	Std. Length (in.)	Fits any listed or certified AL or CU splice with dia. no larger than		Cable Range	Std. Pkg. Qty
					O.D. (in.)	Length (in.)		
HS16-12	0.35	0.12	0.07	3	0.27	1.00	#14 AWG to #10 AWG	25
HS16-12L				6				
HS16-12-4				48				5
HS12-6	0.51	0.16	0.09	3	0.38	1.75	#8 AWG to #6 AWG	25
HS12-6L				6				
HS12-6-4				48				5
HS6-1	0.75	0.24	0.09	4	0.63	2.50	#6 AWG to #2 AWG	25
HS6-1L				8				
HS6-1-4				48				5
HS4-30	1.10	0.35	0.12	5	0.75	3.25	#1 AWG to 3/0 AWG	20
HS4-30L				9				10
HS4-30-4				48				5
HS40-400	1.50	0.47	0.16	8	-	-	2/0 kcmil to 350 kcmil	10
HS40-400L				12				
HS40-400-4				48				5
HS500-1000	2.00	0.63	0.16	9			250 kcmil to 500 kcmil	10
HS500-1000L				15				
HS500-1000-4				48				2
HS12-30**	3.54	1.18	0.17	13			800 kcmil to 1250 kcmil	1
HS30-30**				30				
HS30-4**				48				
HS12-40**	4.72	1.57	0.17	12			1500 kcmil to 2500 kcmil	1
HS30-40**				30				
HS40-4-TB				48				

Order multiple is std. pkg.

All lengths have factory-applied sealant.

**Not UL Listed

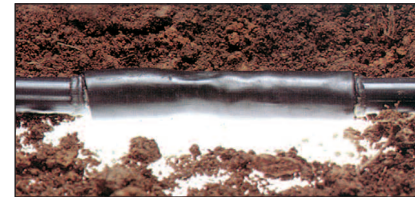


Shrink-Kon™

HS Series Heavy-Wall Heat-Shrinkable Tubing — Red

Cat. No.	Min. Expanded I.D. (in.)	Max. Recovered I.D. (in.)	Length (in.)	For 2-Way Connector Cable Sizes	Std. Pkg. Qty
HS12-6LR	0.51	0.16	6	#8-6 AWG	25
HS6-1LR	0.75	0.24	8	#6-2 AWG	
HS4-30LR	1.10	0.35	9	#1-3/0 AWG	10

Order multiple is std. pkg.

All lengths have factory-applied sealant.

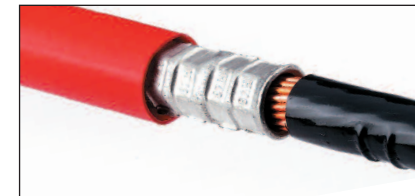

Heavy-Wall Tubing (25' rolls) — Black

Cat. No.	Min. Expanded I.D. (in.)	Max. Recovered I.D. (in.)	Length (in.)	For 2-Way Connector Cable Sizes	Std. Pkg. Qty
HS16-12-25	0.35	0.12	0.07	#14-10 AWG	1
HS12-6-25	0.51	0.16	0.09	#8-6 AWG	
HS6-1-25	0.75	0.24		#6-2 AWG	
HS4-30-25	1.10	0.35	0.12	#1-3/0 AWG	
HS40-400-25	1.50	0.47	0.16	2/0-350 kcmil	
HS500-1000-25	2.00	0.63		250-500 kcmil	

Order by reel, not by feet. 25' reels **not** supplied with factory applied sealant.

